



D4 Type

## D4 Adaptor


Lightem offers a wide variety of adaptor configuration for meeting almost any application. Patching, attaching the two connectors together in perfect alignment condition, is always the critical part of the network. Couplers, hybrid adaptors, male to female type adaptors or bare fiber adaptor are available.

## Specifications

Item	Parameter
Insertion Loss	≤0.2 dB
Durability	0.2 dB max. Increase
Withdrawal Force (g/f)	100 ~ 300
Operating Temperature	-40°C ~ +85°C
Standard	Compliant with JISC5983, TIA /EIA 568B, Bellcore GR-326 , IEC60874-10, IEC61754-6 Telcordia, compliance

## Ordering Information

\* Ordering Code Example

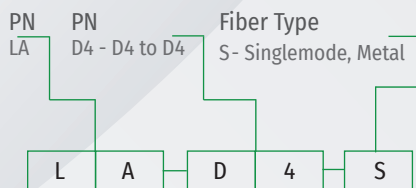

## DIN Adaptor



DIN Type

## Specifications

Item	Parameter
Insertion Loss	≤0.2 dB
Durability	0.2 dB Max. Increase
Withdrawal Force (g/f)	100 ~ 300
Operating Temperature	-40°C ~ +85°C
Standard	Compliant with JISC5983, TIA /EIA 568B, Bellcore GR-326 , IEC60874-10, IEC61754-6 Telcordia, compliance

## Ordering Information

\* Ordering Code Example

