

Mini Termination Box - LTM Series (Outdoor)



Features

- Reusable
- Fast installation and easy maintenance design
- Safety lock
- Support SC or LC adaptor application
- ROHS compliance
- Rugged and durable construction for long term reliability (UV resistance)
- Support wall and pole mount applications
- Support loose tube and distribution cables
- Pass IP65 protection
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance

Specifications

Parameter	Value
Splice Capacity (Max.) Single	4
No. of Splice Trays (Max.)	1
No. of Adaptors (Max.)	4
No. of Cable Entry Ports (Max.)	1 inlet ports, 4 outlet ports
Optic Cable Dimensions (Max.)	7mm to 10mm
Main Material	High Impact Plastic
Colour	Light Gray
Product Dimensions (Height)	210mm
(Width)	140mm
(Depth)	40mm

Product Gallery



Cable Port




Adaptor Port



SpliceTray

Ordering Information

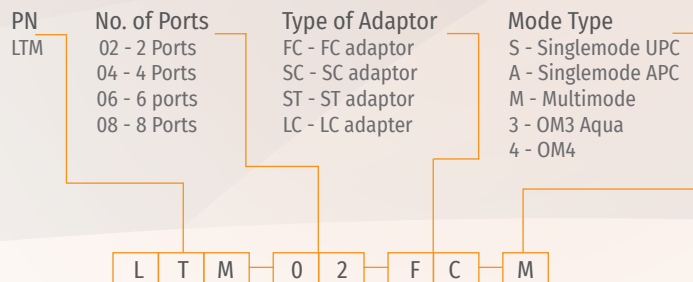

* Ordering Code Example