

Mini Termination Box - LTN Series (Outdoor)



Applications

- Telecommunications Networks
- FTTH Access Networks
- CATV Networks
- Local Area Networks
- Data communication Networks
- Outdoor Applications


Features

- Outdoor use
- Designed for Wall and Pole mount applications
- Safety lock
- Available only for SC adapters (up to 24 Simplex SC adapters)
- IP 65
- Accepts loose tube, distribution cables
- Rugged and durable construction for long term reliability (UV resistance)
- Resistance to vibration and shock
- Can accommodate up to 4 pieces 1 x 8 1 x 16 and 1 x 32 PLC Splitter
- Up to 24 drop cables
- Convenient for expansion of capacity
- Sheath retention & central strength member termination system included
- ROHS compliance
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance

Specifications

Parameter	Value
Splice Capacity (Max.) Single	24
No. of Splice Trays (Max.)	Six (4) trays of 24 fiber
No. of Adaptors (Max.)	24
No. of Cable Entry Ports (Max.)	3 main ports; 24 drop cable ports
Optic Cable Dimensions (Max.)	3 main ports (16mm)
Main Material	High Impact Plastic
Colour	Light Gray
Product Dimensions (Height)	283mm
(Width)	245mm
(Depth)	81mm

Ordering Information

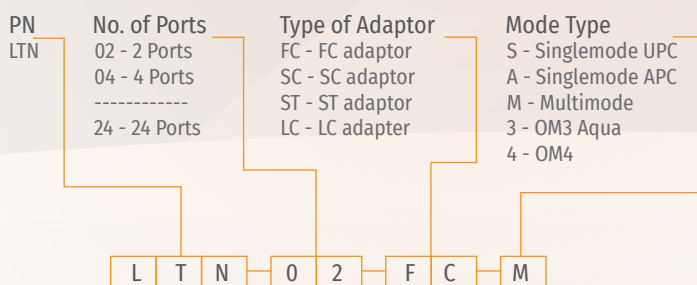

* Ordering Code Example