

Mini Termination Box - LTO Series (Indoor)



Features

- SLIDE-IN-LOCK fiber optic splice tray with > 90° opening angle
- Suitable for cable jointing or distribution
- Quick installation and easy maintenance design
- ROHS compliance
- Rugged and durable construction for long term reliability (UV resistance)
- Engineering plastic material
- Compact and lightweight
- No special tools needed
- Reusable
- Fixing device for reinforced core included
- Wall mount and desktop applications
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance


Specifications

Parameter	
Splice Capacity (Max.) - Single	12
No. of Splice Trays (Max.)	1
No. of Adaptor (Max.)	8 (SC Adaptors)
No. of Cable Entry Ports (Max.)	3
Optic Cable Dimensions (Max.)	2 (16mm) or 3(16mm x1 & 1mm x2)
Main Material	Plastic (PC)
Colour	White
Product Dimensions (Height)	264 mm
(Width)	154 mm
(Depth)	56 mm

Product Gallery



Ordering Information

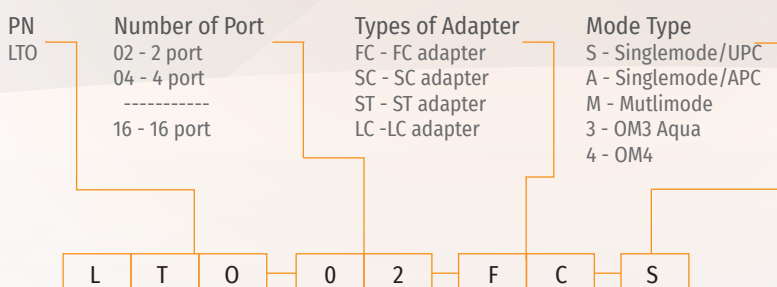

* Ordering Code Example