



Mini Termination Box - LTP Series (Indoor)


Features

- Can be used flush mount or surface mount
- Compatible with almost any standard electricity box
- Compatible with 250 micron and 900 micron fiber types
- Innovative, removable fiber organizer system facilitates an easy installation in the field
- Rugged and durable construction for long term reliability (UV resistance)
- Fiber can be terminated using field installable connectors, fusion splices
- Guaranteed minimum bending radius of 20mm
- One SC or duplex LC connector footprint
- Splice-through function allows moving the FO access point to any other point in the premise
- Provide a clean upgrade path for your indoor wiring by starting off with
- Cu and use the wall plug in combination with indoor Fi/Cu cabling
- Environmental friendly materials, low smoke zero halogen
- Cable entry points : back, bottom, side

Specifications

Parameter	Value
Splice Capacity (Max.) - Single	6
No. of Splice Trays (Max.)	1
No. of Adaptors (Max.)	3
No. of Cable Entry Ports (Max.)	1
Optic Cable Dimensions (Max.)	20mm
Main Material	High Impact Plastic
Colour	Light Gray
Product Dimensions (Height)	81.5mm
(Width)	40.5mm
(Depth)	117mm

Ordering Information

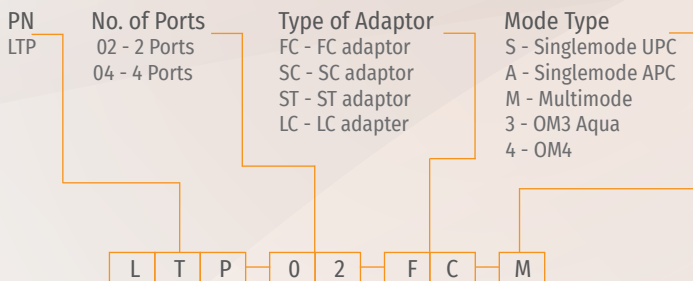

* Ordering Code Example