

Mini Termination Box - LTQ Series (Indoor)



Features

- Window cuts as small as 50mm possible with specific cable constructions such as the TE Mini-breakout cable
- Drop cables can be directed to 4 different sides by rotating the splice module on the base module
- Rugged and durable construction for long term reliability (UV resistance)
- Free breathing enclosure for indoor use
- Front accessible
- Wrap around riser cable installation
- Not required to cut loop-through fibers from riser cable
- Can hold 4 LC connectors or 2 SC connectors
- Compatible with mechanical splice, heat shrink protectors in the same splice holder


Specifications

Parameter	Value
Splice Capacity (Max.) - Single	4
No. of Splice Trays (Max.)	4 (4 different sides)
No. of Adaptors (Max.)	4 LC or 2 SC
No. of Cable Entry Ports (Max.)	4 main ports
Optic Cable Dimensions (Max.)	Main cable (10.5); Drop cable (5mm)
Main Material	High Impact Plastic
Colour	Light Gray
Product Dimensions (Height)	80mm
(Width)	80mm
(Depth)	35mm

Product Gallery



Ordering Information

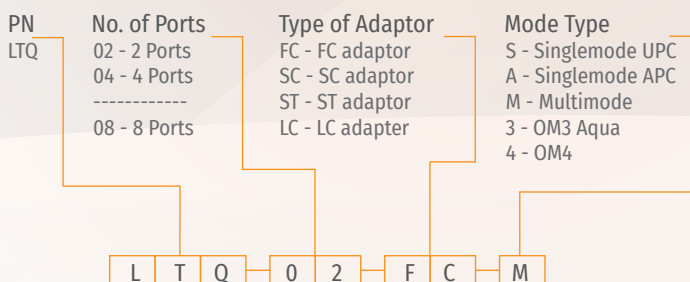

* Ordering Code Example