



Mini Termination Box - LTR Series (Indoor)

Features

- Free breathing enclosure for indoor use
- In-line and boot configuration possible for main cable
- Wrap around cable seals for main cable and drops
- Not required to cut loop-through fibers from riser cable
- Window cuts as small as 70 mm possible with certain cable constructions
- Compatible with mechanical splice, and Heat Shrink Protective Sleeves
- Low smoke zero halogen enclosure material
- Transient free customer provisioning
- Drop cables are terminated individually
- Separate storage of un-connected fibers from spliced drop fibers
- Possibility to integrate PON splitters
- Easy drop cable termination on strain relief device


Specifications

Parameter	Value
Splice Capacity (Max.) - Single	24
No. of Splice Trays (Max.)	2 trays
No. of Adaptors (Max.)	12
No. of Cable Entry Ports (Max.)	1 main port; 8 drop cable ports
Optic Cable Dimensions (Max.)	Main cable (11mm); Drop cable (6mm)
Main Material	High Impact Plastic
Colour	Light Gray
Product Dimensions (Height)	126mm
(Width)	50mm
(Depth)	200mm

Product Gallery



Ordering Information

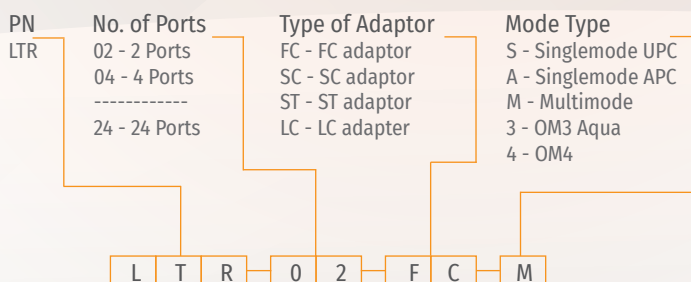

* Ordering Code Example