

## MU Adaptor

Lightem offers a wide variety of adaptor configuration for meeting almost any application. Patching, attaching the two connectors together in perfect alignment condition, is always the critical part of the network. Couplers, hybrid adaptors, male to female type adaptors or bare fiber adaptor are available.

### Features


- Fully in compliance with IEC 61754-6 MU type connector specifications
- Precision mechanical dimensions
- Snap/latch mounting mechanism

### Specifications

Item	Parameter
Insertion Loss	≤0.2 dB
Durability	0.2 dB Max
Withdrawal Force (g/f)	200 ~ 600
Operating Temperature	-40°C ~ +85°C
Standard	Compliant with JISC5974, Bellcore GR-326, IEC61754-4, TIA / EIA 568B, IEC60874-10, Telcordia, JIS compliance
Type	Simplex, Duplex and 8-way

### Product Diagrams


Simplex Type

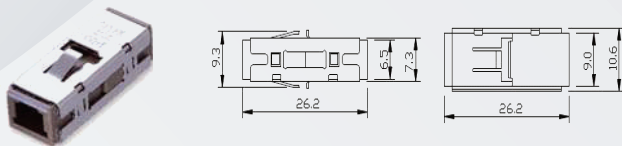

Duplex Type



8 ports Type

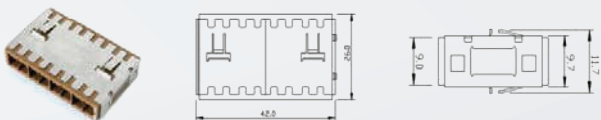

### Ordering Information

\* Ordering Code Example

