

Fiber Attenuator/Terminator - Module Variable Attenuator



Features

- Wide Wavelength Range
- High Attenuation Range
- High Resolution
- Low Cost
- Excellent Environmental Stability and Reliability


Applications

- Power Equalization and Control in Multi- Channel Optically Amplified Networks
- Channel ON/OFF Switch
- CATV
- Receiver Protection
- Optical Sensors

Specifications

Parameters		
Operating Wavelength Range		1310 ±40 and/or 1550 ±40 or 1260 - 1620 nm
Attenuation Range		0.5~40 dB
Max. Insertion Loss		0.5 dB
Max. PDL		0.15 (0~20dB), 0.3dB (20~40dB)0.6 dB
Attenuation Resolution		<0.2 (0~20dB), <0.4dB (20~40dB)
Min. Return Loss		55 dB
Power Handling		300 MW
Fiber Type		SMF-28e fiber or Specify
Operating Temperature		0°C ~ +60°C
Storage Temperature		-40°C ~ +85°C
Package Dimension	(Length)	20 mm
	(Width)	20 mm
	(Height)	15 mm

Ordering Information

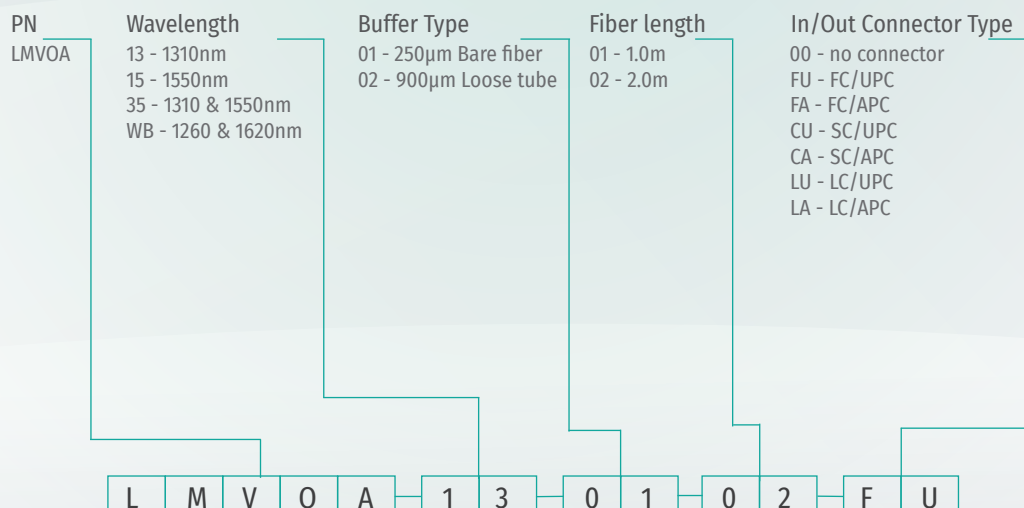

* Ordering Code Example