



LOCF series


Features

- Resistance to vibration, UV and temperature
- Rugged construction with excellent durability
- Easy maintenance after installation
- Reusable
- Compact and lightweight
- No special tools needed
- For cut, uncut, in line and taut sheath applications
- Suitable for both indoor and outdoor cable
- Sheath retention & central strength member anchor system included ROHS compliance
- Pass the IP68 protection (exclude Type A)
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance

Specifications

| Parameter | Value |
|---------------------------------|------------------|
| Cable Entrance Configuration | In-line |
| Splice Capacity (Max.) - Single | 96 |
| No. of Splice Trays (Max.) | 4 |
| No. of Cable Entry Ports (Max.) | 4 |
| Optic Cable Dimensions (Max.) | 4(22mm) |
| Main Material | Plastic (MPP) |
| Color | Black |
| Dimension (Length) | 434mm |
| (width) | 186mm |
| (Height) | 100mm |
| Weight (Net) | 3.80 - 4.20 (kg) |

Ordering Information

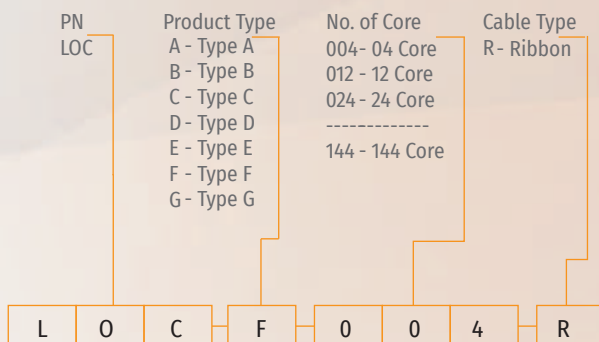

*Ordering information example