


## OTDR Launch Cable Box

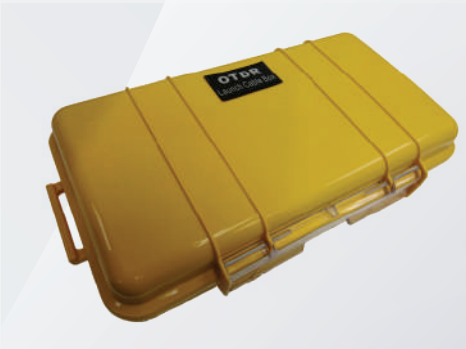

Lightem OTDR Launch Cable Box designed to aid in the testing of fiber optic cable. It used with Optical Time Domain Reflectometers (OTDR's) to help minimize the effects of the OTDR's launch pulse on measurement uncertainty. Available in many different configurations and fiber lengths.

### Features

- Pulse Suppressor, Launch Box, Delay Line, Installation/Testing, Training, Calibration.
- Compound Latch for positive seal and easy opening with locking feature.
- Non metal construction will not dent, corrode, or conduce electricity
- Water and dust proof allowing the unit to be taken into almost any environment.
- Case can house up to 5,000 meters of fiber.
- Auto Purge Valve for changes in altitude and temperature.
- Optional for with SC,LC,FC,ST,MU connector in SM or MM fiber,
- Default branch lentgh is 2meter

### Products Variants



Type A



Type B



Type C



Type D

### Specifications

#### Type A

Length x Width x Height	23.8 x 14.1 x 6.7 (cm)
Material	SR Polypropylene
Color	Yellow
Operating Temperature	-40°C to +55°C
Capacity	2 km

#### Type B

Length x Width x Height	13.5 x 9 x 4.3 (cm)
Material	SR Polypropylene
Color	Yellow
Operating Temperature	-40°C to +55°C
Capacity	0.5 km

#### Type C


Length x Width x Height	23 x 18 x 10 (cm)
Material	Aluminum Alloy
Color	Argent
Operating Temperature	-40°C to +55°C
Capacity	5 km

#### Type D

Length x Width x Height	23 x 18 x 8 (cm)
Material	Aluminum Alloy
Color	Argent
Operating Temperature	-40°C to +55°C
Capacity	3.5 km

## Ordering information

---

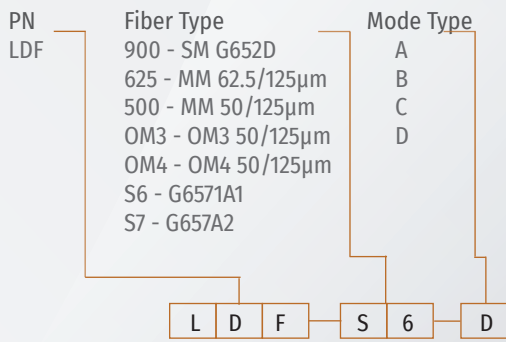

\* Ordering Code Example