

Mini Termination Box - LTX



Features


- Window cuts as small as 50mm possible with specific cable constructions such as the TE Mini-breakout cable
- Drop cables can be directed to 4-12 different sides by rotating the splice module on the base module
- Rugged and durable construction for long term reliability (UV resistance)
- Free breathing enclosure for indoor use
- Front accessible
- Wrap around riser cable installation
- Not required to cut loop-through fibers from riser cable
- Can hold 4-24 LC connectors or 2-12 SC connectors
- Compatible with mechanical splice, heat shrink protectors in the same splice holder

Specifications


Parameter	
No. of Splice Trays (Max.)	12 (12 different sides)
Fiber port (Max.)	24 LC or 12 SC
No. of Cable Entry Ports (Max.)	2 main ports
Optic Cable Dimensions (Max.)	Main cable (10.5); Drop cable (5mm)
Main Material	Cold Rolled Steel
Colour	Black
Product Dimensions (Height)	260mm
(Width)	140mm
(Depth)	40mm

Product Gallery

12 Ports

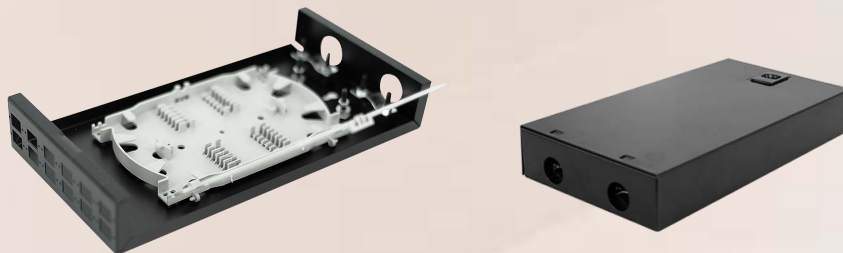

Ordering Information

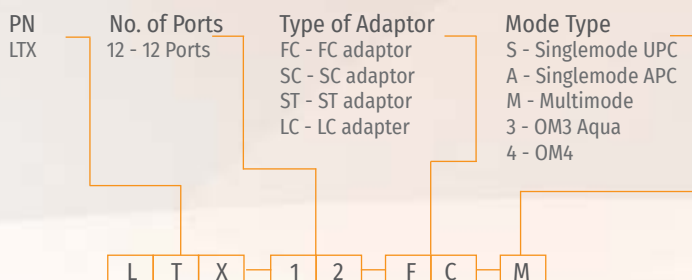

* Ordering Code Example