



LOCE series


Features

- Resistance to vibration, UV and temperature
- Rugged construction with excellent durability
- Easy maintenance after installation
- Reusable
- Compact and lightweight
- No special tools needed
- For cut, uncut, in line and taut sheath applications
- Suitable for both indoor and outdoor cable
- Sheath retention & central strength member anchor system included ROHS compliance
- Pass the IP68 protection (exclude Type A)
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance

Specifications

Parameter	Value
Cable Entrance Configuration	In-line
Splice Capacity (Max.) - Single	48
No. of Splice Trays (Max.)	4 (12 splices type only)
No. of Adaptor (Max.)	8 (SC simplex or LC duplex)
No. of Cable Entry Ports (Max.)	6
Optic Cable Dimensions (Max.)	2 (13mm) / 2 (16mm) / 2 (20mm)
Main Material	Plastic (ABS)
Color	Black
Dimension (Length)	323mm
(width)	202mm
(Height)	86mm
Weight (Net)	2.65 - 2.80 (kg)

Ordering Information

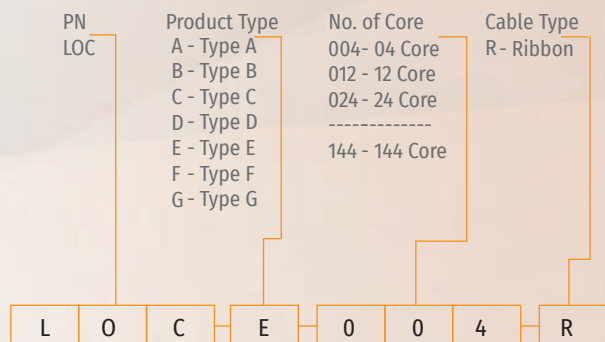

*Ordering information example