

## LOCT series

### Features




- Resistance to vibration, UV and temperature
- Rugged construction with excellent durability
- Easy maintenance after installation
- Reusable
- Compact and lightweight
- No special tools needed
- For cut, uncut, in line and taut sheath applications
- Suitable for both indoor and outdoor cable
- Sheath retention & central strength member anchor system included ROHS compliance
- Pass the IP68 protection (exclude Type A)
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance

### Specifications

Parameter	Value
Splice Capacity (Max.)	288 (Single) or 864 (Mass, Ribbon)
No. of Splice Trays (Max.)	6
No. of Cable Entry Ports (Max.)	1 Oval / 6 Round
Optic Cable Dimensions (Max.)	Oval (30mm) / Round (30mm) or 8 Drop cables(6mm)
Main Material	Plastic (PP)
Colour	Black
Product Dimensions (Height) x (Depth)	Type 1: 488 mm x 285 mm Type 2: 566 mm x 285 mm

### Ordering Information

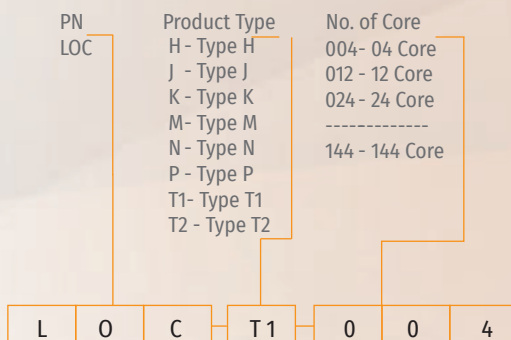

\*Ordering information example