

## LRP Series 19" Slide-out Rack Mount Enclosure



### Features

- Slide out design, easy to access the rear and splice tray
- Adjustable side rack position
- Tray Lock
- Dual mounting poles for outdoor armored cable
- Front patchcord tray for front & side cable management
- Comply with TIA / EIA 568D(2018), Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance


### Specifications

Parameter	1U	2U
No. of Adaptor Plates (Max.)	2	4
No. of Ports (Max.)	≤ 24(ST,FC,SC port) ≤ 64(LC port)	≤ 48(ST,FC,SC port) ≤ 128(LC port)
No. of Cable Entry Ports	4	4
No. of Splice Tray (Max.)	2	4
Material	Cold Rolled Steel(SPCC)	Cold Rolled Steel(SPCC)
Color	Black	Black
Dimension (Height)	44mm	87mm
(width)	440mm	440mm
(Depth)	310mm	310mm
Weight (Net)	3.5kg	4.1kg


### Adaptor Plate

#### • LC port


LC Duplex (12ports)




LC Duplex (16ports)




LC Duplex (24ports)



LC Quad (24ports)




LC Quad (32ports)




#### • SC port


SC Simplex (6ports)




SC Simplex (8ports)



SC Simplex (12ports)




SC Duplex (12ports)




• Others port


ST Simplex (12ports)



FC Simplex (12ports)



E2000 (6ports)



Blank Plate



• Examples

LC Duplex (32ports)



LC Duplex (48ports)



LC Quad (48ports)




LC Quad (64ports)




## Product Diagram

1U Type

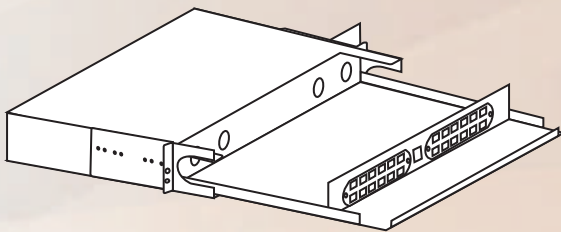

2U Type

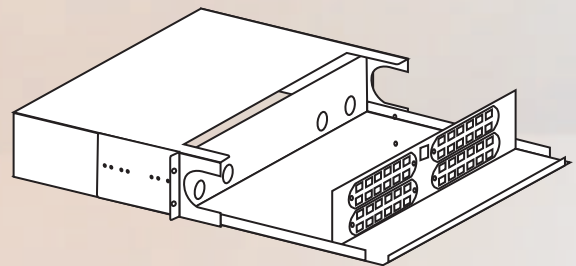

## Ordering Information

PN	Fiber Count	Type of Adaptor	Mode Type
LRP1	04 -4 port	FC - FC adaptor	S - Singlemode/UPC
LRP2	06 -6 port	SC - SC adaptor	A - Singlemode/APC
	-----	ST - ST adaptor	M - Multimode
	128-128 port	LC - LC adaptor	3 - OM3 Aqua
			4 - OM4

L R P 1 0 4 F C A

\*ordering code example