





Features

- Designed for wall mount fiber cable distribution
- · Compact and lightweight
- Reusable
- Quick installation and easy maintenance design
- · No special tools needed
- Removable splice holder for direct interconnection
- IP43 rating
- ROHS compliance
- Support loose tube, distribution and pre-terminated cables
- Bending radius > 30mm
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance

Specifications


Parameter	Value
Splice Capacity (Max.) - Single	12
No. of Splice Trays (Max.)	2
No. of Adaptors (Max.)	6
No. of Cable Entry Ports (Max.)	2
Optic Cable Dimensions (Max.)	2 (10mm)
Main Material	Plastic (ABS
Colour	Light Gray
Product Dimensions (Height)	183mm
(Width)	169mm
(Depth)	19mm

Product Gallery





Ordering Information

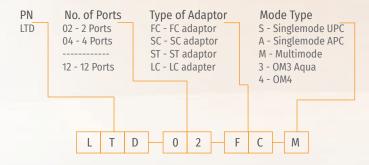

^{*} Ordering Code Example