



## Mini Termination Box - LTN Series (Outdoor)

### Applications

- Telecommunications Networks
- FTTH Access Networks
- CATV Networks
- Local Area Networks
- Data communication Networks
- Outdoor Applications

### Features


- Outdoor use
- Designed for Wall and Pole mount applications
- Safety lock
- Available only for SC adapters (up to 24 Simplex SC adapters)
- IP 65
- Accepts loose tube, distribution cables
- Rugged and durable construction for long term reliability (UV resistance)
- Resistance to vibration and shock
- Can accommodate up to 4 pieces 1 x 8 1 x 16 and 1 x 32 PLC Splitter
- Up to 24 drop cables
- Convenient for expansion of capacity
- Sheath retention & central strength member termination system included
- ROHS compliance
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance



### Specifications

Parameter	Value
Splice Capacity (Max.) Single	24
No. of Splice Trays (Max.)	Six (4) trays of 24 fiber
No. of Adaptors (Max.)	24
No. of Cable Entry Ports (Max.)	3 main ports; 24 drop cable ports
Optic Cable Dimensions (Max.)	3 main ports (16mm)
Main Material	High Impact Plastic
Colour	Light Gray
Product Dimensions (Height)	283mm
(Width)	245mm
(Depth)	81mm

### Ordering Information

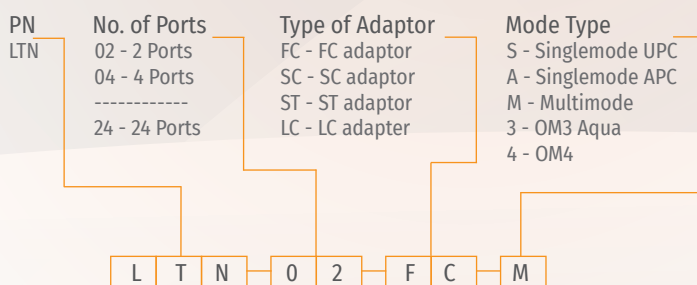

\* Ordering Code Example