Cable Management

Mini Termination Box - LTP Series (Indoor)

Features

- Can be used flush mount or surface mount
- Compatible with almost any standard electricity box
- Compatible with 250 micron and 900 micron fiber types
- Innovative, removable fiber organizer system facilitates an easy installation in the field
- Rugged and durable construction for long term reliability (UV resistance)
- Fiber can be terminated using field installable connectors, fusion splices
- Guaranteed minimum bending radius of 20mm
- One SC or duplex LC connector footprint
- Splice-through function allows moving the FO access point to any other point in the premise
- Provide a clean upgrade path for your indoor wiring by starting off with
- Cu and use the wall plug in combination with indoor Fi/Cu cabling
- Environmental friendly materials, low smoke zero halogen
- Cable entry points : back, bottom, side

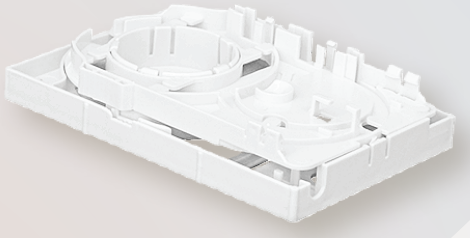

Specifications

Parameter	Value
Splice Capacity (Max.) - Single	6
No. of Splice Trays (Max.)	1
No. of Adaptors (Max.)	3
No. of Cable Entry Ports (Max.)	1
Optic Cable Dimensions (Max.)	20mm
Main Material	High Impact Plastic
Colour	Light Gray
Product Dimensions (Height)	81.5mm
(Width)	40.5mm
(Depth)	117mm

Ordering Information

PN	No. of Ports	Type of Adaptor	Mode Type
LTP	02 - 2 Ports	FC - FC adaptor	S - Singlemode UPC
	04 - 4 Ports	SC - SC adaptor	A - Singlemode APC
		ST - ST adaptor	M - Multimode
		LC - LC adapter	3 - OM3 Aqua
			4 - OM4

L T P - 0 2 - F C - M

* Ordering Code Example

Website: www.lightem.com | Email: info@lightem.com | Tel: +852-26875815 | Fax: +852-26875456
© LIGHTEM® Group All rights reserved. Specifications are subject to change without notice.