

Mini Termination Box - LTX






Features

- Window cuts as small as 50mm possible with specific cable constructions such as the TE Mini-breakout cable
- Drop cables can be directed to 4-12 different sides by rotating the splice module on the base module
- Rugged and durable construction for long term reliability (UV resistance)
- Free breathing enclosure for indoor use
- Front accessible
- Wrap around riser cable installation
- Not required to cut loop-through fibers from riser cable
- Can hold 4-24 LC connectors or 2-12 SC connectors
- Compatible with mechanical splice, heat shrink protectors in the same splice holder


Specifications

Parameter	1	2	3
Model			
No. of Splice Trays (Max.)	4 (4 different sides)	8 (8 different sides)	12 (12 different sides)
Fiber port (Max.)	8 LC or 4 SC	16 LC or 8 SC	24 LC or 12 SC
No. of Cable Entry Ports (Max.)	2 main ports	2 main ports	2 main ports
Optic Cable Dimensions (Max.)	Main cable (10.5); Drop cable (5mm)	Main cable (10.5); Drop cable (5mm)	Main cable (10.5); Drop cable (5mm)
Main Material	Cold Rolled Steel	Cold Rolled Steel	Cold Rolled Steel
Colour	Black	Black	Black
Product Dimensions (Height)	200mm	260mm	260mm
(Width)	110mm	135mm	140mm
(Depth)	35mm	40mm	40mm

Product Gallery

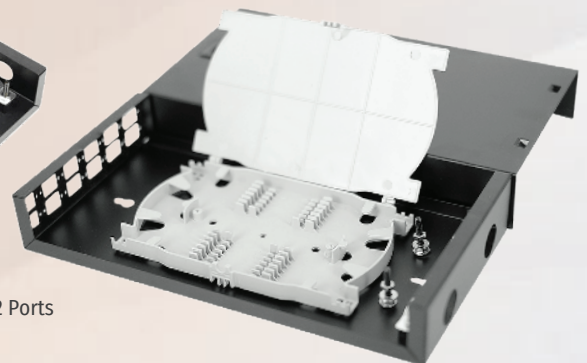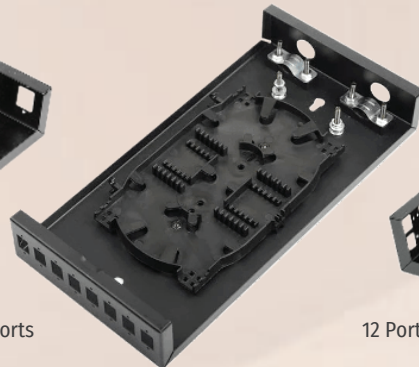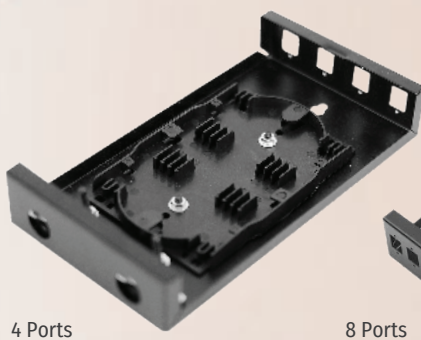

Ordering Information

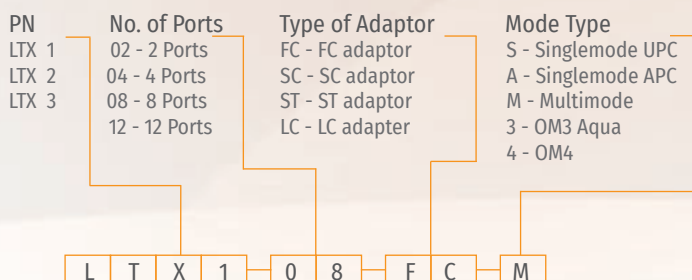

* Ordering Code Example