

CAT6A 8P8C PLUG / 8P8C PLUG


Order Information: LIGC6A-8P8C-x

x = Length

- 001 1M
- 0015 1.5M

- 0990 99m

2000 ±30MM

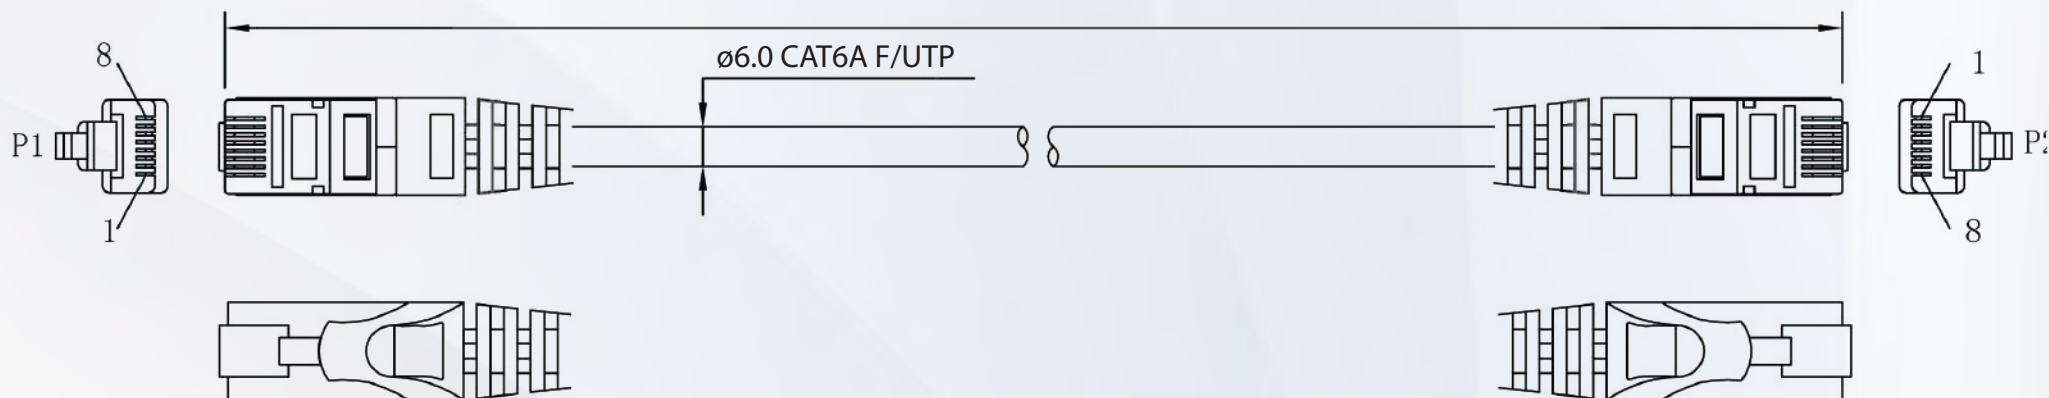

NOTES:

- 1.ELECTRICAL TEST: 100% OPEN,SHORT & MISS WIRE TEST.
- 2.CONDUCTOR RESISTANCE: 5 OHMS MAX. INSULATOR RESISTANCE:5M OHMS MIN.
3. HI-POT: DC 300V 0.01 sec.
4. ALL MATERIAL FIT ROHS STANDARD(INCLUDE ALL PACKING OR OTHER MATERIAL).
5. TIA/EIA-568-B.2-1, ISO/IEC11801:2002 CLASS EA, F/UTP CAT.6A
CABLES PERFORMANCE MEETS TRANSMISSION REQUIREMENTS UP TO
500 MHZ AND SUPPORT 10 GIGABITETHERNET (10G BASE-TX).

REMARK:

1. CABLE : C6A F/UTP 26AWG 7*0.16BC ; OD: 6.0MM LSZH & PVC JACKET ; OD: 6.0±0. 15MM
2. MATERIAL : INDOOR : PVC= BLUE / LSZH = GREY
OUTDOOR : PVC= BLACK / LSZH= BLACK
3. CONN.: P1,P2 8P8C PLUG, TWO PIECES DOUBLE LAYER WITH SHELL ,SHELL GOLD PLATED
4. ALL HOOD : MOLDED PVC.
5. ABLE ASS'Y MUST PASS CONTINUITY TEST

