



LFTP Series IP65/66 Outdoor Wall-mount Fiber Enclosure

Features


- High quality cold roll steel 1.5mm or BS316 Stainless steel 1.5mm
- Two compartments in one box with dual doors, spacious design for splicing, fiber storage and patching
- Waterproof design to meet the requirements of indoor and outdoor harsh environment
- Fiber cable lead in and fixing unit meets the need of multiple cable fixed
- A unique drop cable fixing device and multiple layer fixed, each drop cable is fixed separately, convenient for the expansion and maintenance
- Wall mounted installation with anti-invading design, easy & fast installation and reliable
- Ingress Protection: IP65 / 66
- 1.2mm thickness of mild steel with the electrostatic spray layer
- Routing spools for guiding the excess cable
- Comply with TIA / EIA 568D(2018), Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance

Specifications


| Parameter | LFTP 1 | LFTP 2 | LFTP 3 | LFTP 4 |
|---------------------------|--|---------------|----------------|----------------|
| No. of Adapter Plates | 4 | 8 | 12 | 16 |
| No. of Splice Tray (Max.) | 2 | 4 | 6 | 8 |
| No. of Ports (Max.) | ≤24 | ≤48 | ≤72 | ≤96 |
| | (≤48 LC Type) | (≤96 LC type) | (≤144 LC type) | (≤192 LC type) |
| Material | Cold roll steel 1.5mm or BS316 Stainless steel 1.5mm | | | |
| Color | Beige | Beige | Beige | Beige |
| Dimension (Height) | 380mm | 400mm | 570mm | 710mm |
| (width) | 420mm | 420mm | 450mm | 450mm |
| (Depth) | 110mm | 145mm | 145mm | 145mm |

Product Gallery


48 Ports

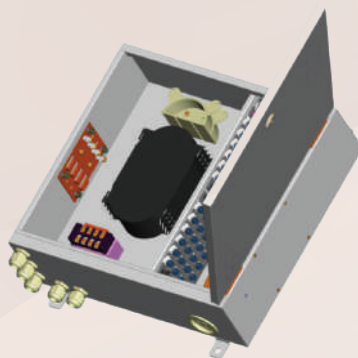

72 Ports

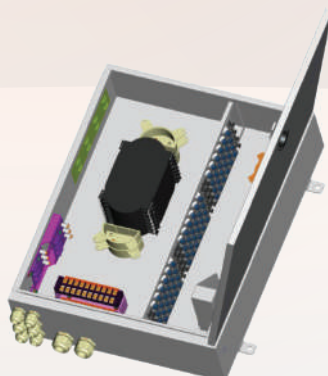

Ordering Information

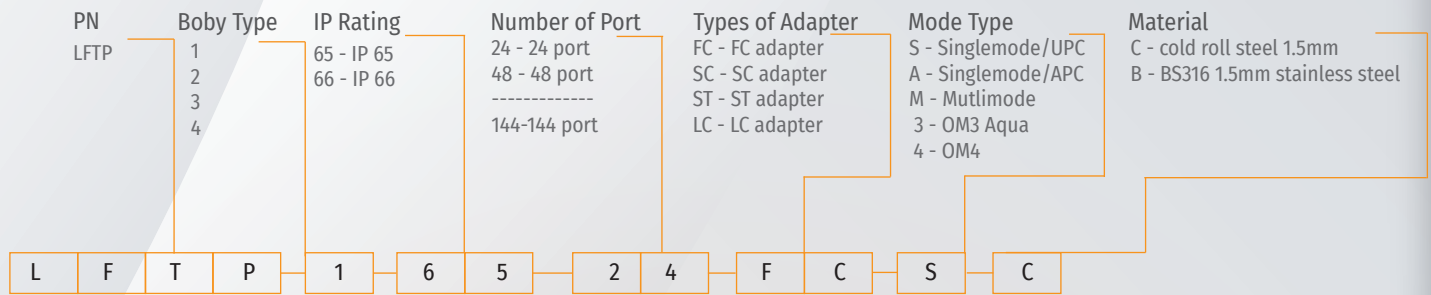

*Ordering code example