

CAT6A UTP 8P8C PLUG/8P8C PLUG LSZH PATCH CORD




Order Information: LIGC6A-UTP-8P8C-x

x = Length

- 001 1M

- 0015 1.5M

- 0990 99m

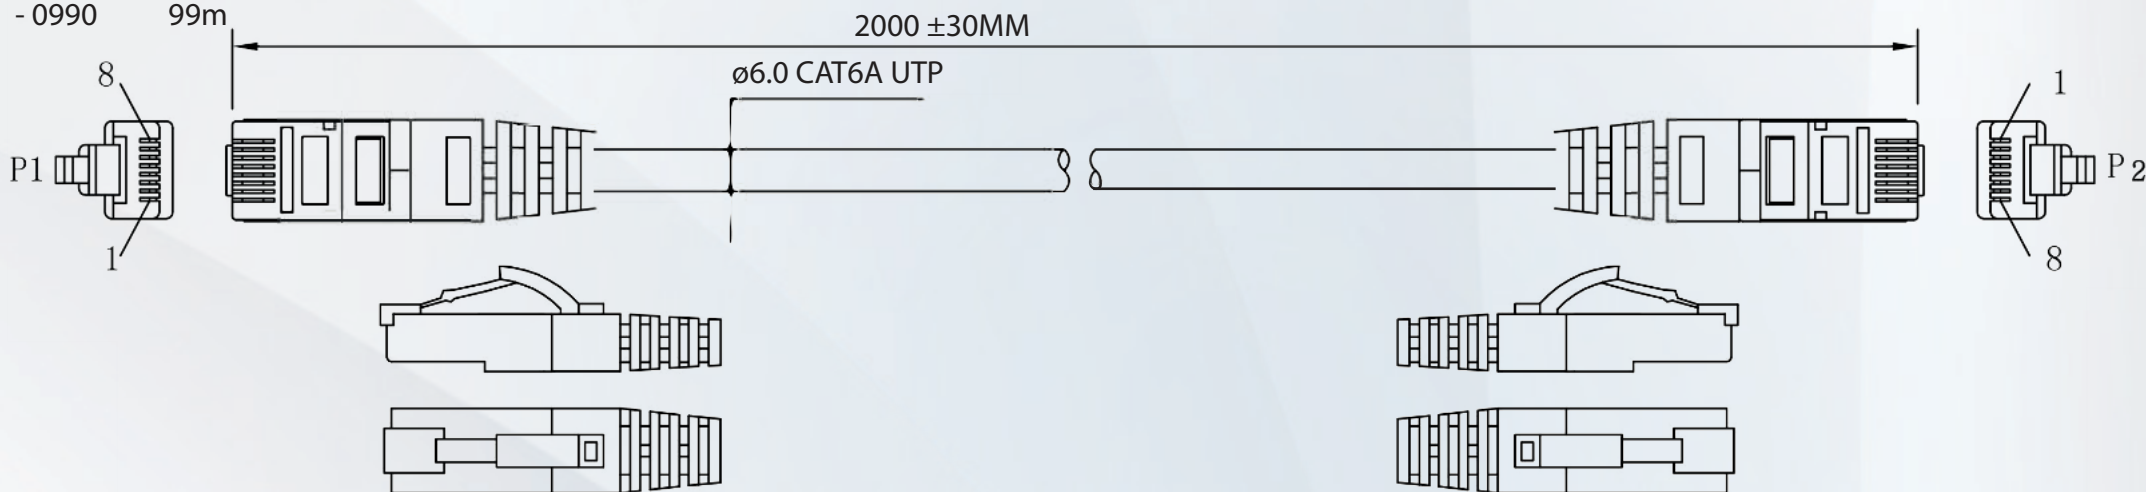

NOTES:

1. ELECTRICAL TEST: 100% OPEN.SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX. INSULATOR RESISTANCE: 5M OHMS MIN.
3. HI-POT: DC 300V 0.01sec.
4. ALL MATERIAL FIT ROHS STANDARD (INCLUDE ALL PACKING OR OTHER MATERIAL).
5. TIA/EIA-568-B.2-1, ISO/IEC 11801:2002 CLASS EA, UTP CAT.6A (INDOOR) CABLES PERFORMANCE MEETS TRANSMISSION REQUIREMENTS UP TO 500 MHZ AND SUPPORT 10GIGABITETHERNET (10G BASE-TX).

REMARK:

1. CABLE : CAT6A UTP 24ZAGW 7*0.2BC ; OD: 6.0MM LSZH JACKET
2. CONN. : P1, P2 8P8C PLUG, TWO PIECES DOUBLE LAYER WITH SHELL, SHELL GOLD PLATED
3. ALL HOOD: MOLDED LSZH
4. CABLE ASS'Y MUST PASS CONTINUITY TEST

