Cable management

LTXM Series 19” Slide-out Rack Mount Enclosure

Features

- Slide out design, easy to access the rear and splice tray
- Dual mounting poles for outdoor armored cable
- Track slide out design, easy to access
- Comply with TIA / EIA 568D(2018), Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance
- High density ports, 48 SC and 96 LC at 1U feasible

Specifications

Parameter		1U	2U	3U	4U
No. of Ports (Max.)		≦48	≦96	≦144	≦192
		≦96(LC port)	≦192(LC port)	≦288(LC port)	≦384(LC port)
No. of Cable Entry Ports		4	4	4	4
No. of Splice Tray (Max.)		2	4	6	8
Material		Cold rolled steel (SPCC)			
Color		Black			
Dimension	(Height)	45mm	90mm	125mm	180mm
	(width)	440mm	440mm	440mm	440mm
	(Depth)	320mm	320mm	320mm	320mm
Weight	(Net)	2.7kg	3.2kg	3.5kg	4.1kg

Adaptor Plate

- 1U type

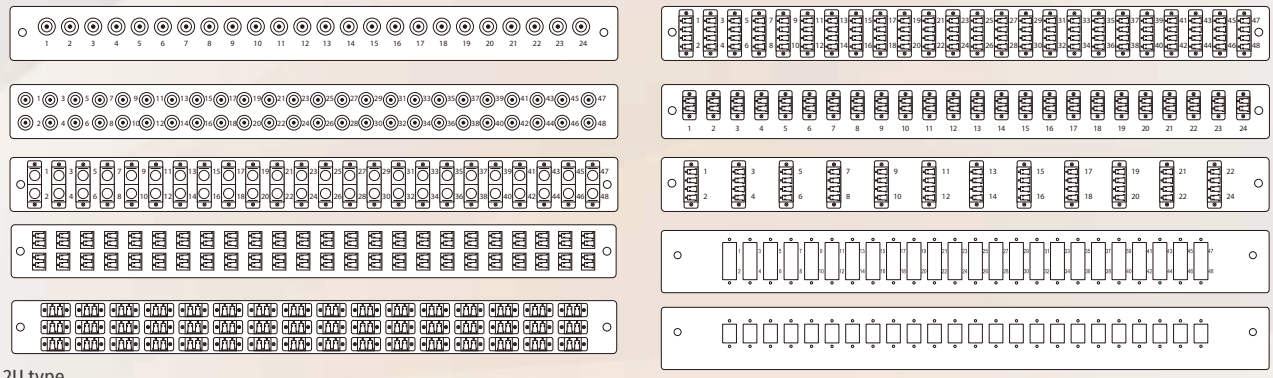

- 2U type

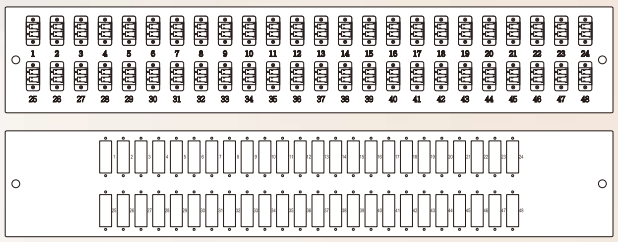

- 4U type

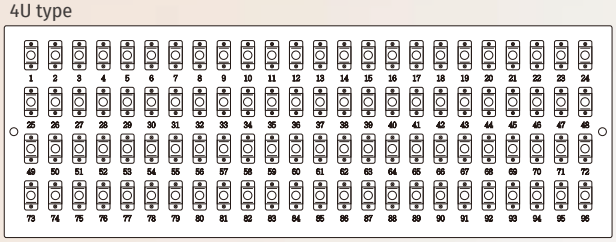

Product Diagram

1U type

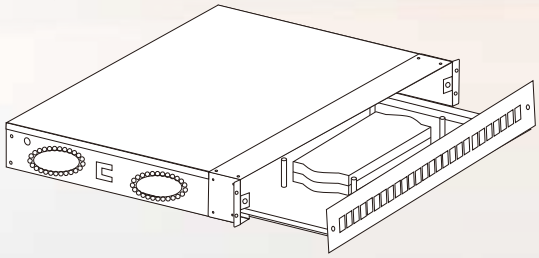

2U type

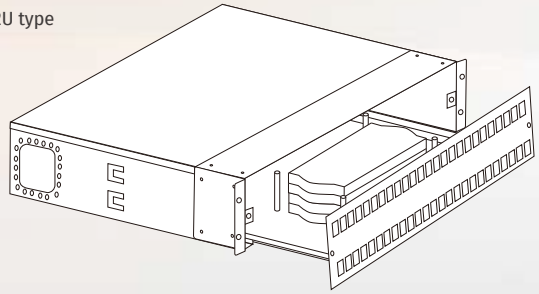

Website: www.lightem.com | Email: info@lightem.com | Tel: +852-26875815 | Fax: +852-26875456
© LIGHTEM® Group All rights reserved. Specifications are subject to change without notice.

Product Diagram

3U type

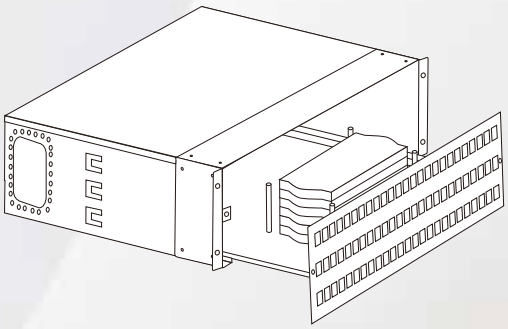

4U type

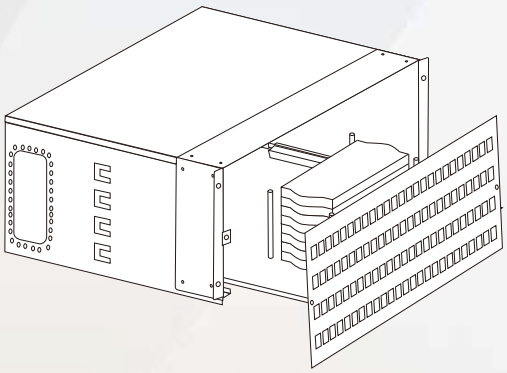

Ordering Information

PN	Number of Port	Types of Adapter	Mode Type
LTXM 1	06 - 06 port	FC - FC adapter	S - Singlemode/UPC
LTXM 2	12 - 12 port	SC - SC adapter	A - Singlemode/APC
LTXM 3	24 - 24 port	ST - ST adapter	M - Mutlimode
LTXM 4	48 - 48 port	LC -LC adapter	3 - OM3 Aqua
	----------		4 - OM4
	384 - 384 port		

L	T	X	M	1	0	6	F	C	S

*ordering code example

© LIGHTEM® Group All rights reserved. Specifications are subject to change without notice.